
ZRIKA®

Believe in a better tomorrow

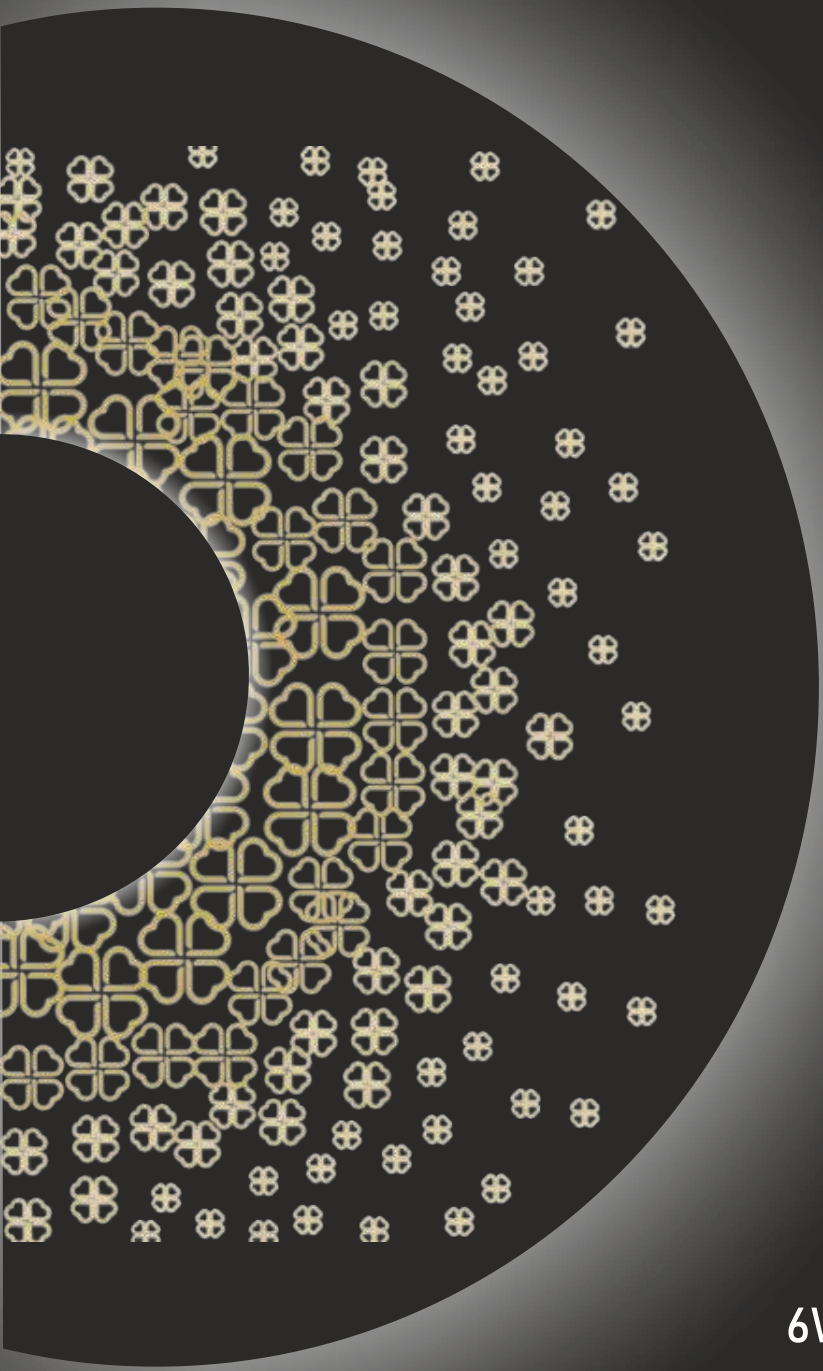

LED LIGHT
6W TO 800W

www.zrika.in

About us

Established in 2017, we are a team of technocrats who firmly believes that technology should be deeply connected with a cause to make optimum use of it. Every member of Team Zrika lives by this mission and work towards making a positive difference in the life of every human being.

After its painstaking efforts, Zrika today provides customized and ingenious lighting solutions. We manufacture and offer an extensive array of indoor, outdoor and industrial lighting.

The products are manufactured by our adept professionals using supreme grade components and modern techniques; available in diverse design and specifications as required. While we have been constantly working on delivering state-of-the-art products to our customers, the optimization of our resources helps us in ensuring the cost of these amazing products is pocket-friendly.

Why Choose Us?

What do you expect from your lighting vendor?
Just the product & installation? Is it enough?
I believe the answer will be a partial yes and a partial no.

We at Zrika, bring in a 360 degree of lighting solution to you. Yes, lighting-as-a-solution which covers the most preliminary stage of requirement collection, designing, planning and brainstorming with your views. implementation and of course the post-sales maintenance & service.

While we have worked with clients on the smallest to largest scale with most simple to most complex designs, we bring in the added touch of customization with each client we work with. Every customer is a unique story and we would rather love to be a part of that story and not just a mention.

ZRIKA®
Believe in a better tomorrow

10,000 sq,.ft.
Manufacturing Facility

200+
Clients/Dealers

5+ years
Experience

PRODUCT RANGE

Outdoor LED Lights

Both Extrusion and PDC based diesets to produce intelligently designed floodlights & streetlights. We have wide range from 15W to 800W for outdoor lighting solution.

- Unified Solar Street Light
- Solar Flood Light
- Street Lights
- Flood Lights
- Highmast
- Garden Lights

Industrial LED Lights

Wide range of 60W to 800W extrusion based distinguished bay light fixtures for industries with highest quality and all the necessary protections.


- Industrial Bulb
- Highmast
- Highbay

Indoor LED Lights

Our own Die sets to manufacture the most elegant metal and polycarbonate based indoor lighting series, which ranges from 6W to 60W and in round & square shapes.

- Down Lights
- Deep Down Lights
- Spot Lights
- Commercial Lights
- LED Bulb & Tube Lights
- Profile Lights








INDOOR
LIGHTS

Down light

Poly carbonate Body & Aluminium Body

Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	9 W	12 W		15 W		20 W	
Model Number	ZI-DL-9R	ZI-DL-9S	ZI-DL-12R	ZI-DL-12S	ZI-DL-15R	ZI-DL-22R	ZI-DL-22S
Cutout Diameter	100mm	100x100mm	125x125mm	150mm	150x150mm	150mm	150x150mm
Lumens Diameter	≥ 550 lm	≥ 1100 lm		≥ 1650 lm		≥ 2000 lm	
Colour Temprature(CCT)	3000K/ 4000K/ 6500K						
CRI	≥ 80						





Down light
3 in 1

Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	9 W	12 W		15 W		20 W	
Model Number	ZI-DL-9R	ZI-DL-9S	ZI-DL-12R	ZI-DL-12S	ZI-DL-15R	ZI-DL-22R	ZI-DL-22S
Cutout Diameter	100mm	100x100mm	125x125mm	150mm	150x150mm	150mm	150x150mm
Lumens Diameter	≥ 550 lm	≥ 1100 lm		≥ 1650 lm		≥ 2000 lm	
Colour Temprature(CCT)	3000K/ 4000K/ 6500K						
CRI	≥ 80						





Deep Down Light

Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	**12 Watt**	**18 Watt**
Model Number	ZI-DDL-12	ZI-DDL-18
Outer Diameter	120mm	155mm
Cutout Diameter	105mm	145mm
Lumens Output	≥ 1100 lm	≥ 1650 lm
Color Temperature (CCT)	3000K/ 4000K/ 6500K	
CRI	≥ 80	





Deep Down Light
3 in 1

Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	**12 Watt**	**18 Watt**
Model Number	ZI-DDL-12	ZI-DDL-18
Outer Diameter	120mm	155mm
Cutout Diameter	105mm	145mm
Lumens Output	≥ 1100 lm	≥ 1650 lm
Color Temperature (CCT)	3000K/ 4000K/ 6500K	
CRI	≥ 80	





Spot Light

Applications:

1. Supermarkets
2. Hotels
3. Clothing Shops
5. Luxury Stores
6. Shopping Malls
7. Exhibitions

Technical Information:

Power Consumption	**7 Watt**	**12 Watt**	**18 Watt**
Model Number	ZI-SPL-7	ZI-SPL-12	ZI-SPL-18
Total Dimensions	60x68x62mm	73x83x93mm	81x95x93mm
Lumens Output	≥ 700 lm	≥ 1200 lm	≥ 1800 lm
Color Temperature (CCT)		3000K/ 4000K/ 6500K	
CRI	≥ 80		





COB Down Light


Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	**12 Watt**	**18 Watt**
Model Number	ZI-DDL-12	ZI-DDL-18
Outer Diameter	120mm	155mm
Cutout Diameter	105mm	145mm
Lumens Output	≥ 1100 lm	≥ 1650 lm
Color Temperature (CCT)	3000K/ 4000K/ 6500K	
CRI	≥ 80	



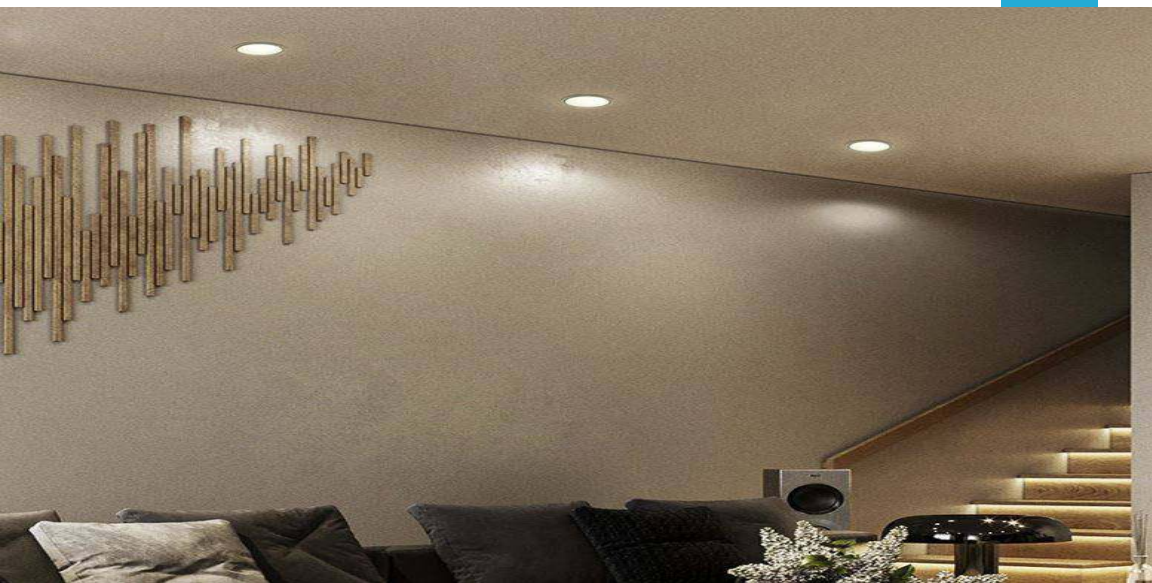

Surface Cylinder Light

Applications:

1. Supermarkets
2. Hotels
3. Clothing Shops
5. Luxury Stores
6. Shopping Malls
7. Exhibitions

Technical Information:

Power Consumption	**7 Watt**	**12 Watt**	**18 Watt**
Model Number	ZI-SPL-7	ZI-SPL-12	ZI-SPL-18
Total Dimensions	60x70mm	72x90mm	86x100mm
Lumens Output	≥ 700 lm	≥ 1200 lm	≥ 1800 lm
Color Temperature (CCT)		3000K/ 4000K/ 6500K	
CRI	≥ 80		





Track Light

Applications:

1. Supermarkets
2. Hotels
3. Retail Shops
5. Luxury Stores
6. Malls
7. Exhibitions

Technical Information:

Power	12 W	20 W	30 W
Dimension	D64 x H115	D80 x H135	D80 x H155
Beam Angle	36	45	45
Body Colour	WH, BK	WH, BK	WH, BK
MRP	1125	1500	1815





Commercial Light

Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	25 Watt	45 Watt	60 Watt
Model Number	ZI-1X1DL-25	ZI-2X2DL-45	ZI-2X2DL-60
Outer Diameter	300x300mm	620x620mm	620x620mm
Cutout Diameter	280x280mm	580x580mm	580x580mm
Lumens Output	≥ 2125 lm	≥ 3825 lm	≥ 5100 lm
Color Temperature (CCT)	3000K/ 4000K/ 6500K		
CRI	≥ 80		



Clean Room

Applications:

1. Pharmaceutical
2. Hospitals
3. Automobile Showrooms
4. Offices

Technical Information:

Power Consumption	**24 Watt (1x1) DL**	**40 Watt (2x2) DL**	**40 Watt (2x2) CR**	**60 Watt (2x2) CR**
Model Number	ZI-CR-1X1DL24	ZI-CR-2X2DL40	ZI-CR-2X2CR40	ZI-CR-2X2CR60
Outer Diameter	295x295mm	610x610mm	610x610mm	610x610mm
Cutout Diameter	275x275mm	570x570mm	570x570mm	570x570mm
Lumens Output	≥ 2400 lm	≥ 4000 lm	≥ 4000 lm	≥ 6000 lm
Color Temperature (CCT)	3000K/ 4000K/ 6500K			
CRI	≥ 80			







PROFILE
LIGHTS




10MM conceal

Length	Body Colour	Dimension
2 MTR	ANODIZED	




5070 surface

Length	Body Colour	Dimension
2.4 MTR	ANODIZED	




17MM surface

Length	Body Colour	Dimension
2 MTR/ 3 MTR	ANODIZED	




17MM conceal

Length	Body Colour	Dimension
2 MTR/ 3 MTR	ANODIZED	




25MM surface


Length	Body Colour	Dimension
2 MTR	ANODIZED	




25MM conceal

Length	Body Colour	Dimension
2 MTR	ANODIZED	


SILICON
LIGHTS
W W W LEDNEWS.LIGHTING





Sl1010

Length	Dimension
200MTR	




Sl1212

Length	Dimension
100MTR	



Sl1616

Length	Dimension
100MTR	

Rope LED



LED	CCT	OUTPUT
120	WW, NW, WH, BLUE	220V
120	RED, GREEN, PINK ICE BLUE, AMBER	220V

Hanging Profile Lights

Applications:

1. Residential
2. Shops
3. Corridors
4. Fitness Centers
5. Showrooms
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	36Watt	60Watt	72Watt	100Watt
Length	4ft	6ft	8ft	12ft
Body Colour	White/Black/Grey			
CRI	>70 or >80			
CCT	3000K / 4000K / 5700K / 6500K			






LED Strip Light

Technical Information:


LED	120	180	240	180
PCB	8mm	10mm	10mm	5mm
CCT	5000K	500K	5000K	3K,4K,6K
OUTPUT	12V	12V	12V	12V











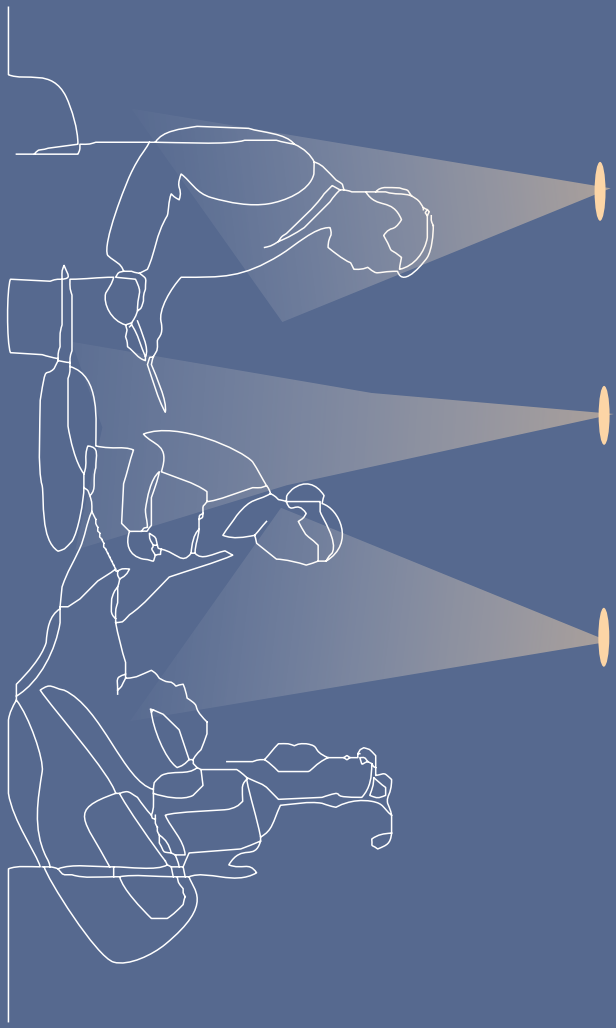

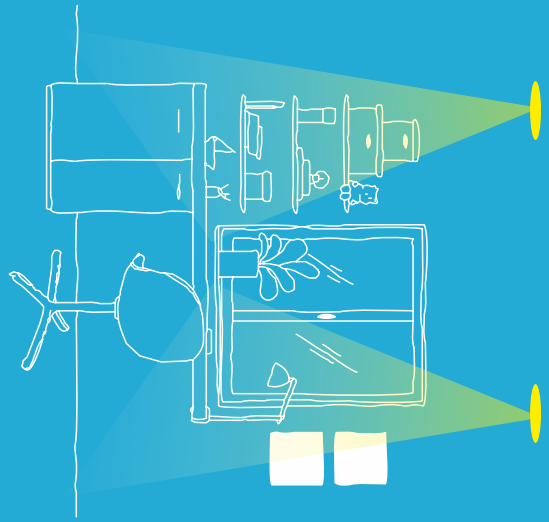

BELIEVE IN A BETTER TOMORROW

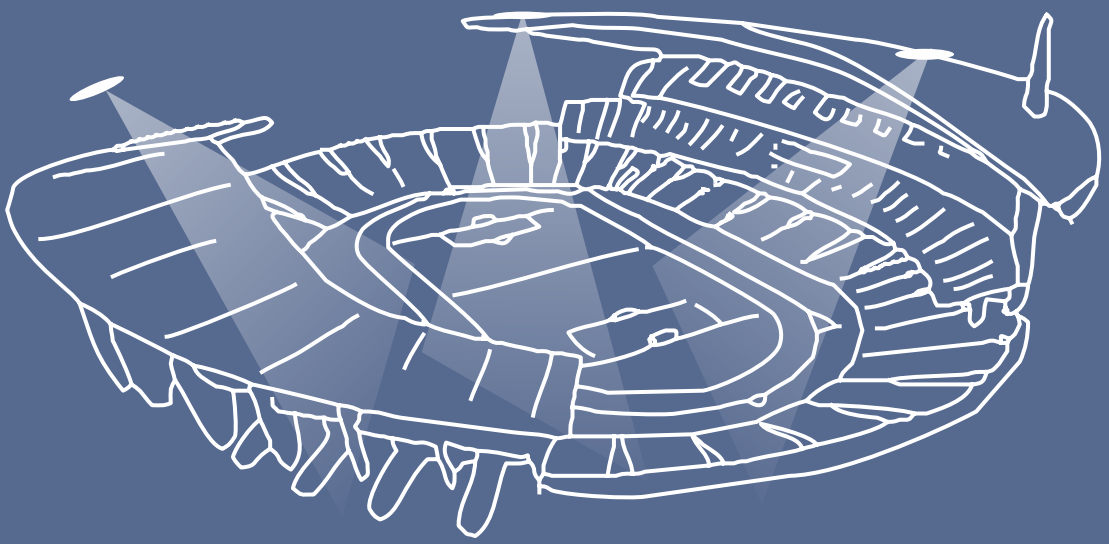

DESIGN & BUILD




OUTDOOR
LIGHTS

Unified Solar LED Street Light

Features:

1. No AC POWER CABLES REQUIRED
2. Automated Light Sensors
3. Easy Installation and Maintenance
4. Long Life and Theft Proof Lithium Battery Pack
5. Built-In PIR Motion Sensor (Optional)

Application:

1. Residential Society/ Gardens
2. Commercial Complex
3. Village Roads/Highways

Technical Information:

Power Consumption	12 Watt	18 Watt	24 Watt	30 Watt	40 Watt	50 Watt	80 Watt
Model Number	ZI-SSL-20	ZI-SSL-18	ZI-SSL-24	ZI-SSL-30	ZI-SSL-40	ZI-SSL-50	ZI-SSL-80
PV Module	28 Wp	34 Wp	50 Wp	58 Wp	68 Wp	100 Wp	136 Wp
Battery	12 Ah	15 Ah	18 Ah	24 Ah	30 Ah	48 Ah	72 Ah
Lumens Output	≥ 1200	≥ 1800	≥ 2400	≥ 3000	≥ 4000	≥ 5000	≥ 8000
Beam Angle	120°						
CRI	3000K/ 4000K/ 6500K						
CCT	≥ 80						





Solar Flood Light

Features:

1. No AC POWER CABLES REQUIRED
2. Automated Light Sensors
3. Easy Installation and Maintenance
4. Long Life and Theft Proof Lithium Battery Pack
5. Built-In PIR Motion Sensor (Optional)

Application:

1. Commercial Complex
2. Sports Grounds
3. Gardens
4. Airports
5. Railway Yards
6. Farm House

Technical Information:

Power Consumption	12 Watt	18 Watt	24 Watt	30 Watt	40 Watt	50 Watt	70 Watt
Model Number	ZI-SFL-20	ZI-SFL-18	ZI-SFL-24	ZI-SFL-30	ZI-SFL-40	ZI-S5L-50	ZI-SFL-70
PV Module	40 Wp	50 Wp	60 Wp	70 Wp	90 Wp	120 Wp	150 Wp
Battery	12 Ah	15 Ah	18 Ah	24 Ah	30 Ah	48 Ah	72 Ah
Lumens Output	≥ 1200	≥ 1800	≥ 2400	≥ 3000	≥ 4000	≥ 5000	≥ 7000
Beam Angle	120°						
CRI	3000K/ 4000K/ 6500K						
CCT	≥ 80						





Street Light
Glass Model

Applications:

1. Residential Society
2. Gardens
3. Commercial Complex
4. Village Roads/ Highways

Technical Information:

Power Consumption	20 Watt	24 Watt	30 Watt	36 Watt	48 Watt	60 Watt	90 Watt	120 Watt	150 Watt
Model Number	ZI-SLG-20	ZI-SLG-24	ZI-SLG-30	ZI-SLG-36	ZI-SLG-48	ZI-SLG-60	ZI-SLG-90	ZI-SLG-120	ZI-SLG-150
Lumens Output	≥ 2000	≥ 2400	≥ 3000	≥ 3600	≥ 4800	≥ 6000	≥ 9000	≥ 12000	≥ 15000
Pipe Diameter	42mm	42mm	42mm	42mm	42mm	54mm	54mm	54mm	54mm
Beam Angle	120°								
CRI	3000K/ 4000K/ 6500K								
CCT	≥ 80								





Street Light
Frame Model

Applications:

1. Residential Society
2. Gardens
3. Commercial Complex
4. Village Roads/ Highways

Technical Information:

Power Consumption	30 Watt	36 Watt	48 Watt	60 Watt	90 Watt	120 Watt	150 Watt
Model Number	ZI-SLF-30	ZI-SLF-36	ZI-SLF-48	ZI-SLF-60	ZI-SLF-90	ZI-SLF-120	ZI-SLF-150
Lumens Output	≥ 3000	≥ 3600	≥ 4800	≥ 6000	≥ 9000	≥ 12000	≥ 15000
Pipe Diameter	42mm	42mm	42mm	54mm	54mm	54mm	54mm
Beam Angle	120°						
CRI	3000K/ 4000K/ 6500K						
CCT	≥ 80						





Smallest Street Light

Applications:

1. Residentials
2. Shops
3. Corridors
4. Fitness centers
5. Showroom
6. Offices
7. Utility Areas
8. Hospitals

Technical Information:

Power Consumption	Model Number	Lumens Output	Pipe Diameter	Beam Angle	CCT	CRI
18 Watt	ZI-SLS-18	≥ 1800	38 mm	60°	3000K 4000K 6500K	≥ 80





Street Light/Flood Light


Applications:

1. Residential Society
2. Gardens
3. Commercial Complex
4. Village Roads/ Highways

Technical Information:

Power Consumption	Model Number	Lumens Output	Pipe Diameter	Beam Angle	CCT	CRI
24 Watt	ZI-SLSF-24	≥ 2400	42 mm	60°	3000K 4000K 6500K	≥ 80



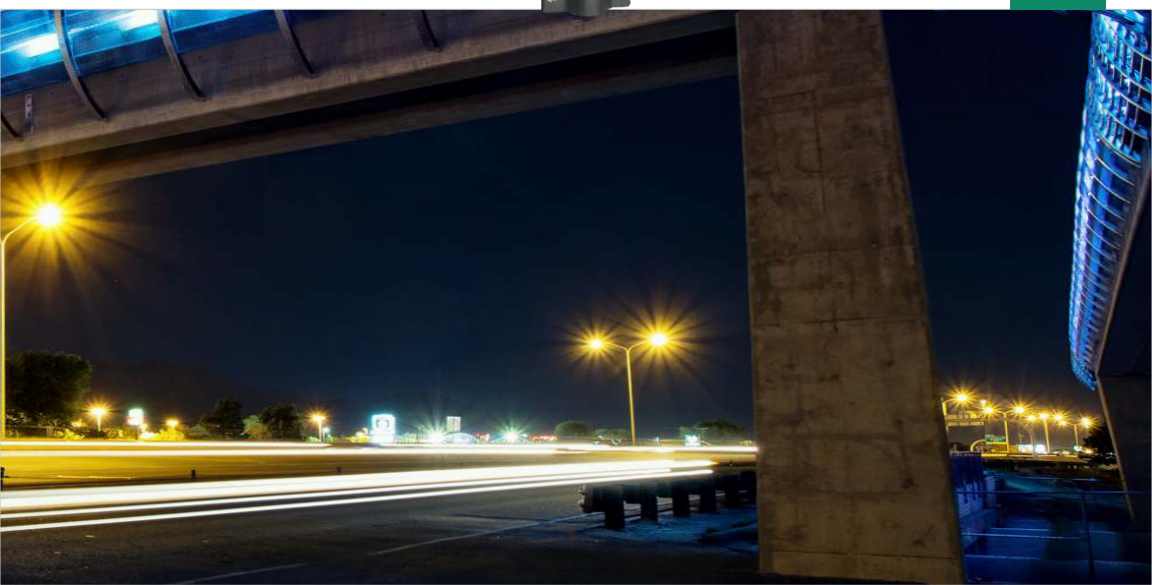

Flood Light
Bottom choke


Applications:

1. Commercial Complex
2. Sports Grounds
3. Gardens
4. Airports
5. Railway Yards
6. Farm House

Technical Information:

Power Consumption	24 Watt	36 Watt	60 Watt	100 Watt	120 Watt	150 Watt	200 Watt
Model Number	ZI-FLD-24	ZI-FLD-36	ZI-FLD-60	ZI-FLD-100	ZI-FLD-120	ZI-FLD-150	ZI-FLD-200
Lumens Output	≥ 2400 lm	≥ 3600 lm	≥ 6000 lm	≥ 10000 lm	≥ 12000 lm	≥ 15000 lm	≥ 20000 lm
Beam Angle	120°						
Color Temperature (CCT)	3000K/ 4000K/ 6500K						
CRI	≥ 80						



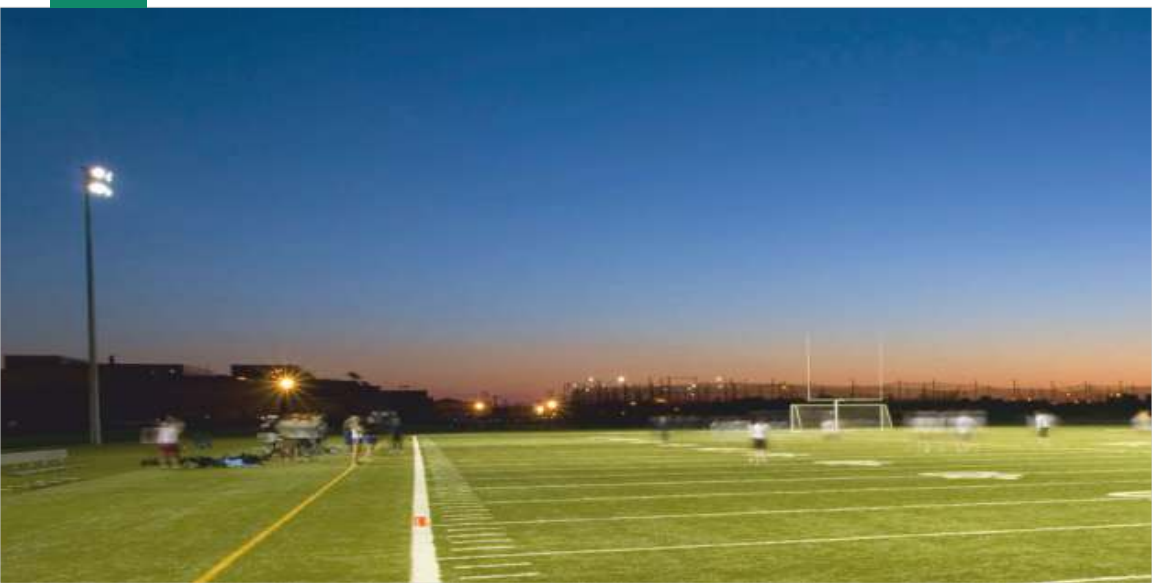

Flood Light
Back Choke

Applications:

1. Commercial Complex
2. Sports Grounds
6. Gardens
4. Airports
5. Railway Yards
6. Farm House

Technical Information:

Power Consumption	200 Watt	300 Watt
Model Number	ZI-FLB-200	ZI-FLB-300
Lumens Output	≥ 20000 lm	≥ 30000 lm
Beam Angle	120°	
Color Temperature (CCT)	3000K/ 4000K/ 6500K	
CRI	≥ 80	






High Mast/ High Bay


Applications:

1. Warehouses
2. Industrial facilities
6. Manufacturing Facilities
4. Parking Lot
5. Sports Complex
6. Party Plots

Technical Information:

Power Consumption	60 Watt	120 Watt	180 Watt	240 Watt	360 Watt	420 Watt	480 Watt
Model Number	ZI-HBO-60	ZI-HBO-120	ZI-HBO-180	ZI-HBO-240	ZI-HBO-360	ZI-HBO-420	ZI-HBO-480
Lumens Output	≥ 6000	≥ 12000	≥ 18000	≥ 24000	≥ 36000	≥ 42000	≥ 48000
Beam Angle	60°						
CRI	3000K/ 4000K/ 6500K						
CCT	≥ 80						

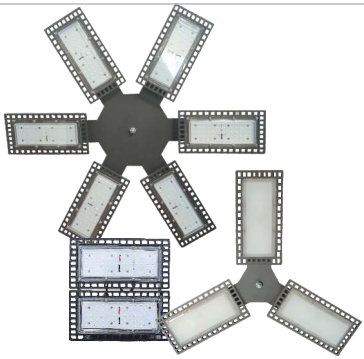

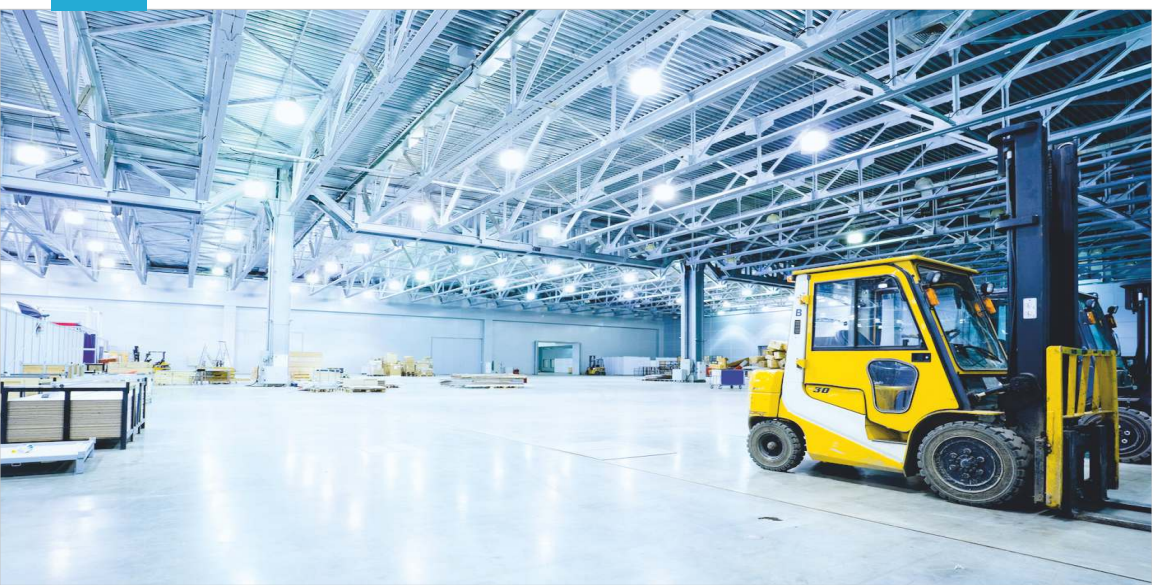

Well Glass


Applications:

1. Parking area
2. Industrial area
3. Garden area
4. Open yard
5. Highway

Technical Information:

Power Consumption	40Watt	50Watt	60Watt	72Watt	80Watt	90Watt	100Watt	120Watt
Lumens Output	>130lm							
CCT	3000K / 4000K / 5700K / 6500K							
CRI	>70 or >80							



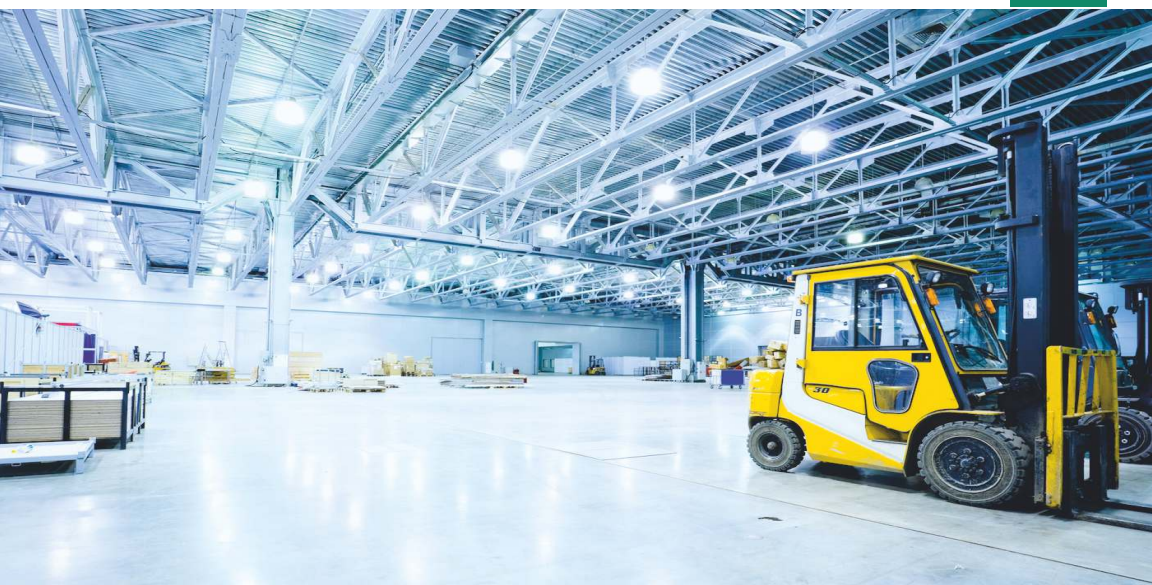

Garden Light

Applications:

1. Parking area
2. Industrial area
3. Garden area
4. Open yard
5. Highway

Technical Information:

Power Consumption	**40 Watt**	**60 Watt**	**120 Watt**
Model Number	ZI-GL-40	ZI-GL-60	ZI-GL-120
Lumens Output	≥ 4000 lm	≥ 6000 lm	≥ 12000 lm
Dimensions	620x450 mm (Width x Heigh)		
Pipe Dimensions	300x89x100 mm (Height x Inner Diameter x Outer Diameter)		
Color Temperature (CCT)	3000K/ 4000K/ 6500K		
CRI	≥ 80		





Canopy Light

Technical Information:

Power Consumption	60Watt	120Watt	240Watt
Lumens Output	>130lm		
CCT	3000K / 4000K / 5700K / 6500K		
CRI	>70 or >80		
Lower cutoff (VAC)	100 VAC		
Upper cutoff (VAC)	305 VAC		
Supply Protection (VAC)	Up to 440VAC		
Surge	6KVA in driver		





ZRIKA

Believe in a better tomorrow



Manufactured & Marketed by:

ZRIKA®

Believe in a better tomorrow

Dealers Contact Details:

Authorised Dealer

www.zrika.in